
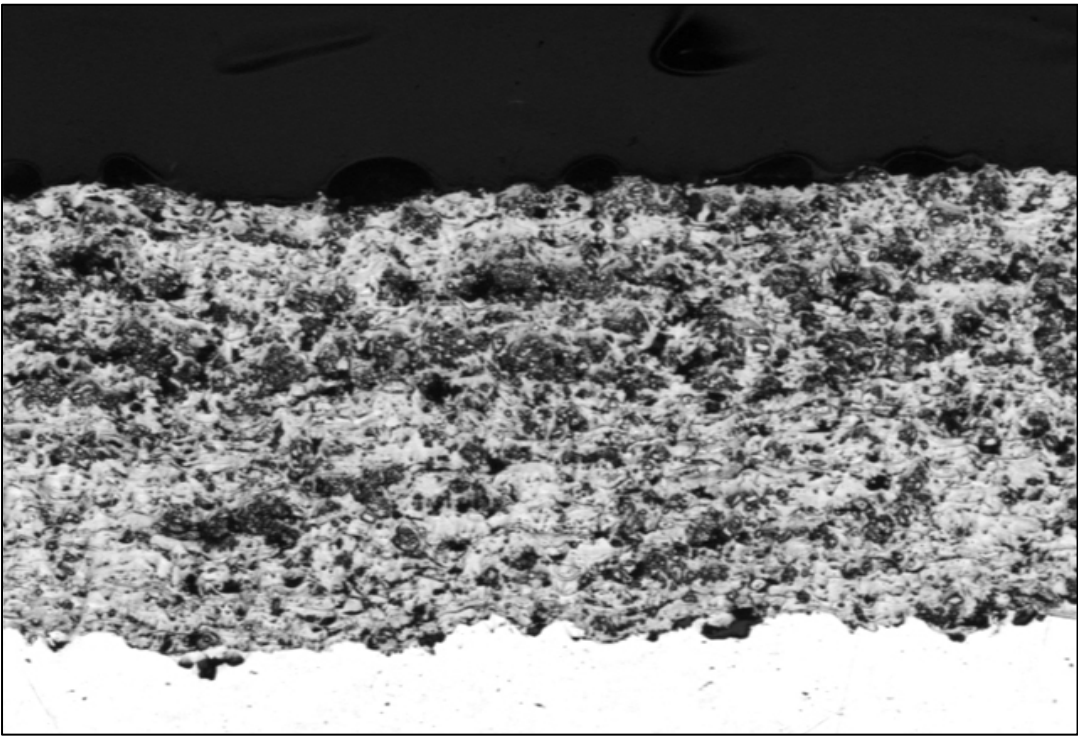


# Linear Roughness Evaluation as per ASME B46.1

|                    |                     |                                                       |
|--------------------|---------------------|-------------------------------------------------------|
| <b>Date:</b>       |                     | <b>Units:</b> microns                                 |
| <b>Laboratory:</b> | Clemex Technologies | <b>Magnification:</b> 100x                            |
| <b>Department:</b> | Quality Control     | <b>Calibration:</b> 1.2676 $\mu\text{m}/\text{pixel}$ |
| <b>User:</b>       |                     | <b># of fields:</b> 1                                 |
| <b>Sample ID:</b>  | 1 side coating      | <b>Total area:</b> 493616.32                          |

|           |           |           |           |           |           |          |          |
|-----------|-----------|-----------|-----------|-----------|-----------|----------|----------|
|           | <b>Rq</b> | <b>Ra</b> | <b>Rt</b> | <b>Rp</b> | <b>Rv</b> | <b>L</b> | <b>N</b> |
| Roughness | 7.18      | 5.47      | 36.63     | 15.28     | -21.35    | 808.73   | 320      |

Distance from the mean through the evaluation length in default units

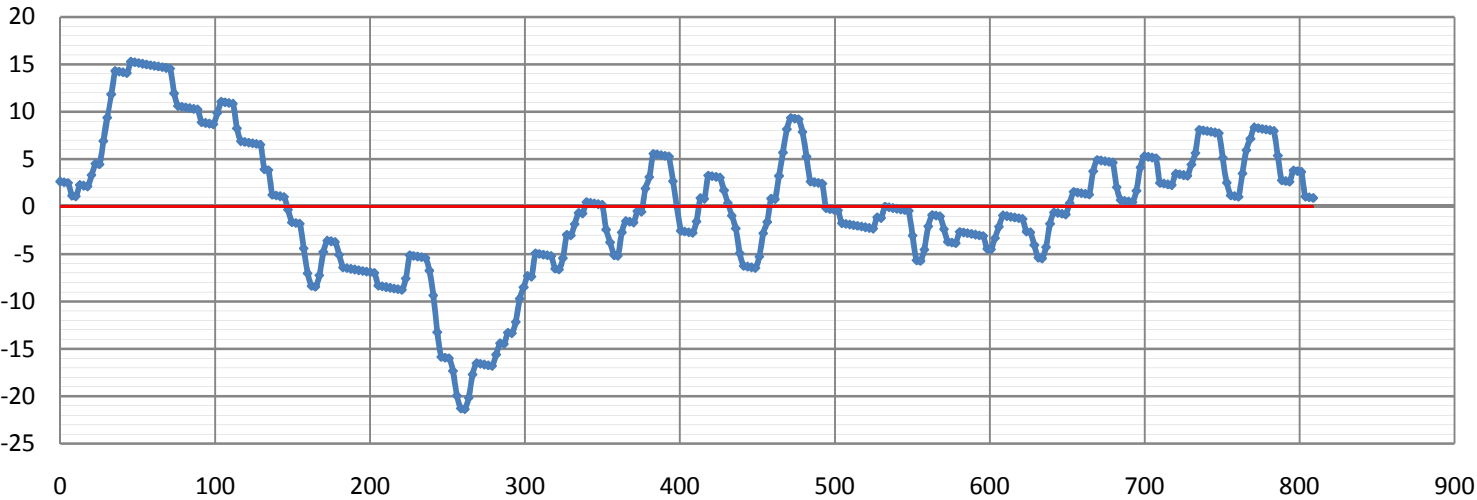

Comments: